


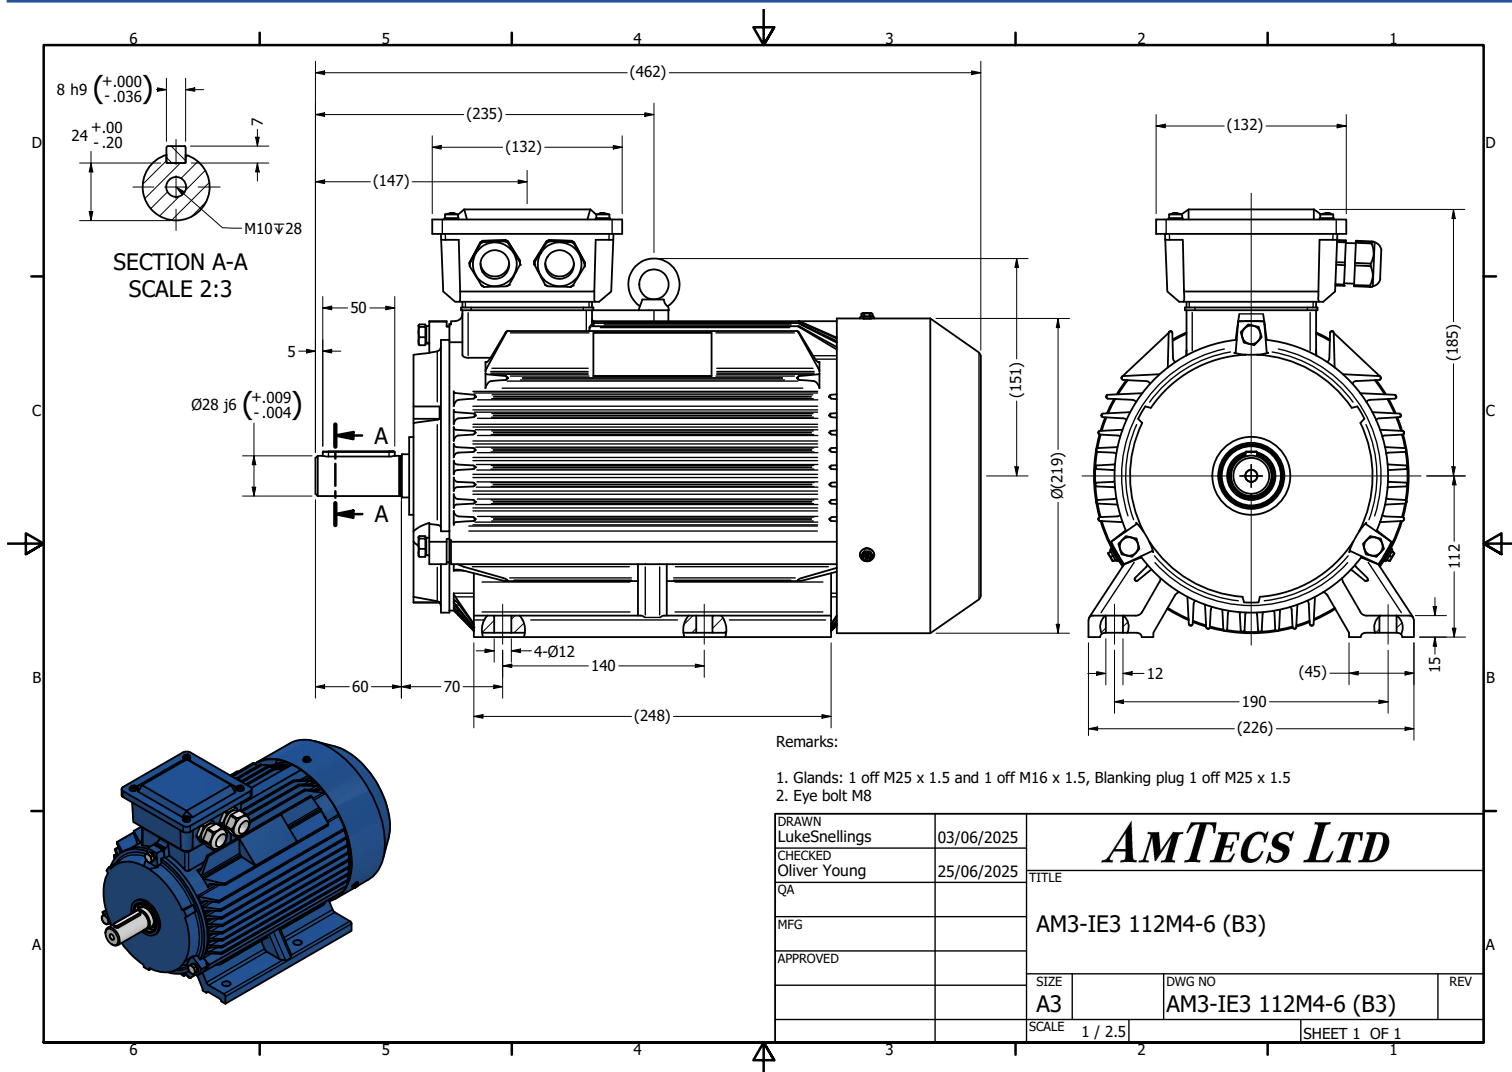

Specification **IEC 60034-1**

Manufacturer **AmTecs**

Motor type **AM3-IE3 112M6**

Rated power **2.2 kW S1 Duty**

Speed **955 rpm**

Voltage **220V / 400V**

Frequency **50 Hz**

Connection **Delta / Star**

Full load current **9.18 A / 5.3 A**

No-load current

Enclosure **IP55**

Insulation class **F (temp. rise B)**

Max. ambient temp **40 °C**

Max. altitude **1000 mtr above sea level**

Comment

Cable entry **M25 x 1.5**

Construction **Cast Iron**

Weight **53 Kg**

Type number

Warranty

Efficiency class **IE3**

Load data **100% 75% 50% 25%**

Efficiency **84.3%**

Power factor **0.71**

Sound pressure level (1m) **58 dB(A)**

Resistance R20 (open)

Resistance R20 (Delta)

Full load torque **22 Nm**

Starting / Full load torque **2.6**

Pull up / Full load torque

Pull out / Full load torque **3**

Starting / Full load current (DOL) **5.5**

Starting / Full load current (Y/D)

Rotor Inertia

Bearing DE **6306**

Bearing NDE **6306**

|                                                                                                                               |                                        |
|-------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>AmTecs Ltd</b><br>Charnham Park, Hungerford<br>Berkshire, RG17 0YT<br>Tel: +44 (0) 1488 686970<br>Fax: +44 (0) 1488 686968 |                                        |
|                                                                                                                               | sales@amtecs.co.uk<br>www.amtecs.co.uk |