


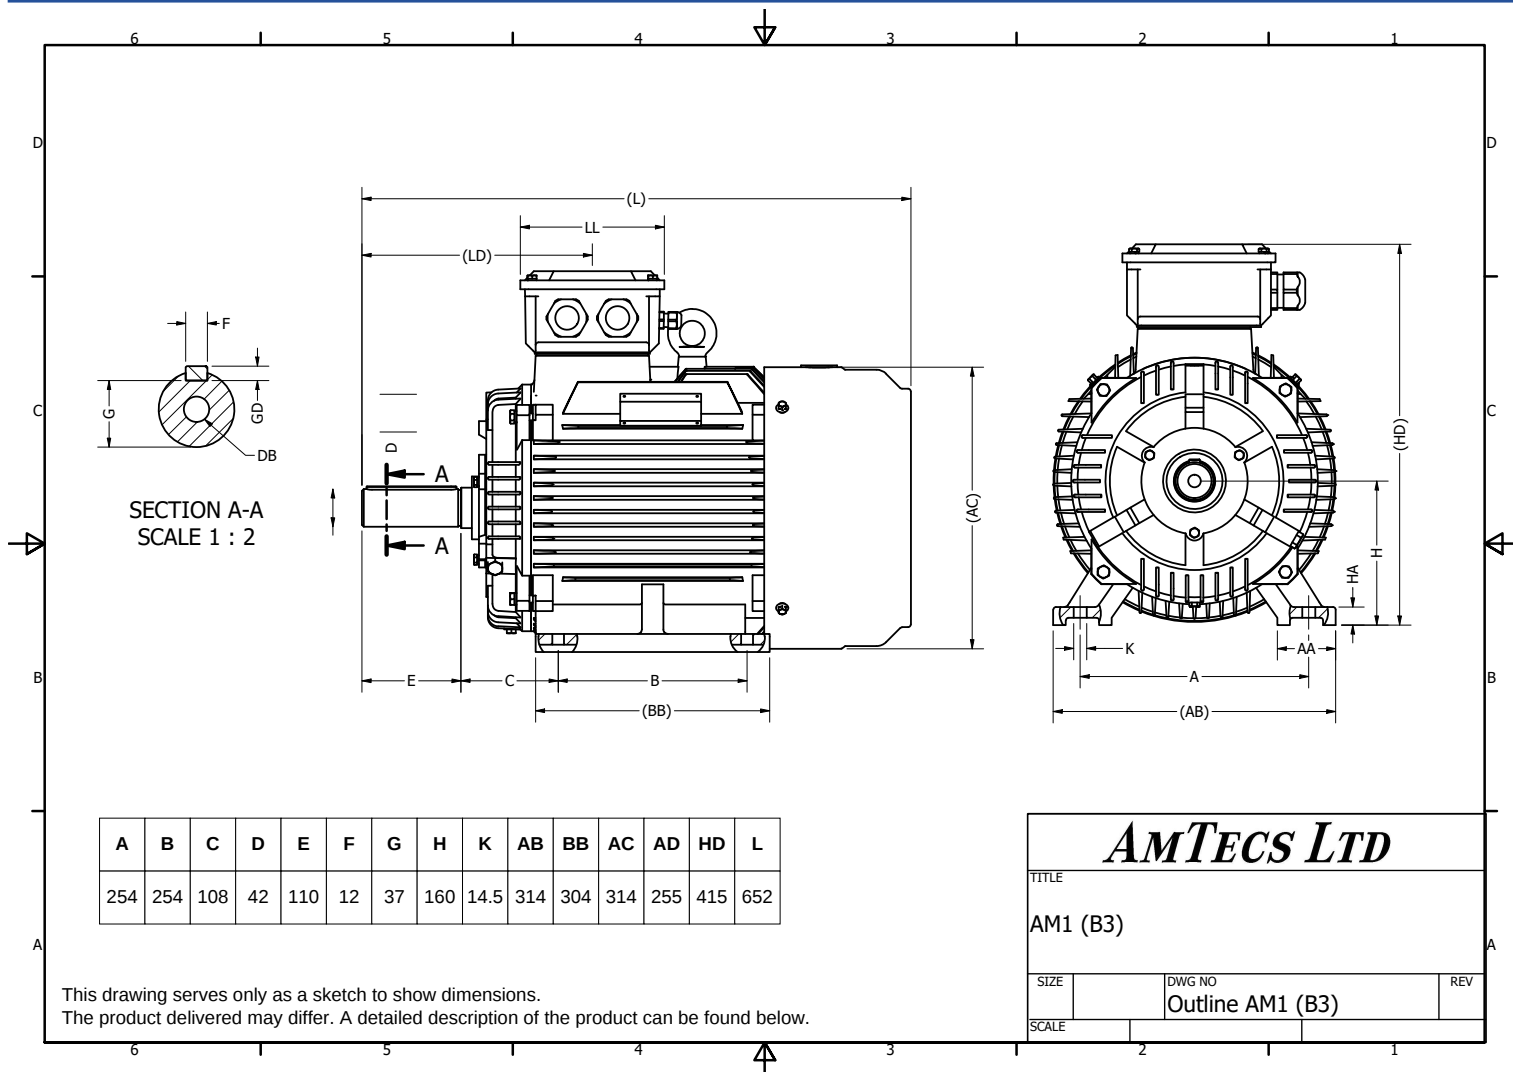

Specification	IEC 60034-1
Manufacturer	AmTecs
Motor type	AM4-IE4 160L4
Rated power	15 kW S1 Duty
Speed	1480 rpm
Voltage	400V / 690V
Frequency	50 Hz
Connection	Delta / Star
Full load current	27.4 A / 15.9 A
No-load current	
Enclosure	IP55
Insulation class	F (temp. rise B)
Max. ambient temp	40 °C
Max. altitude	1000 mtr above sea level
Comment	
Cable entry	M32 x 1.5
Construction	Cast Iron
Weight	145 Kg
Type number	
Warranty	

Efficiency class	IE4
Load data	100% 75% 50% 25%
Efficiency	93.9% 93.5% 91.9%
Power factor	0.84
Sound pressure level (1m)	dB(A)
Resistance R20 (open)	
Resistance R20 (Delta)	

Full load torque	96.8	Nm
Starting / Full load torque	2.8	
Pull up / Full load torque		
Pull out / Full load torque	3.3	

Starting / Full load current (DOL)	9.5
Starting / Full load current (Y/D)	
Rotor Inertia	
Bearing DE	6309
Bearing NDE	6209

AmTecs Ltd	
Charnham Park, Hungerford	
Berkshire, RG17 0YT	
Tel: +44 (0) 1488 686970	sales@amtecs.co.uk
Fax: +44 (0) 1488 686968	www.amtecs.co.uk